



ARIES W

VARCAS

01 | High Quality Hinges


High quality hinges are built to last and can withstand the constant movement and stress that windows endure when opened & closed which ensures that your window operates smoothly.

02 | 45° Joinery

All fitments of sections are done at 45°.

03 | Conceal Provision

A conceal guide is provided in the frame which helps to conceal the whole system for a seamless view.

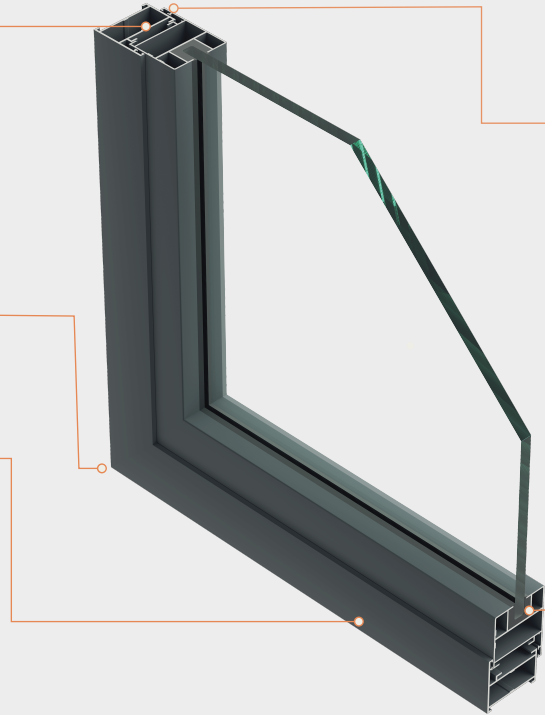


04 | D - Rubber


This gasket provides a cushioning effect which prevents the shutter rattling or vibrating in the frame, especially in windy weather.

05 | Glazing Gasket


Glazing gasket creates a weatherproof seal between glass & aluminum panel. this also helps to hold the glass securely in place without rattling and shifting of glass.

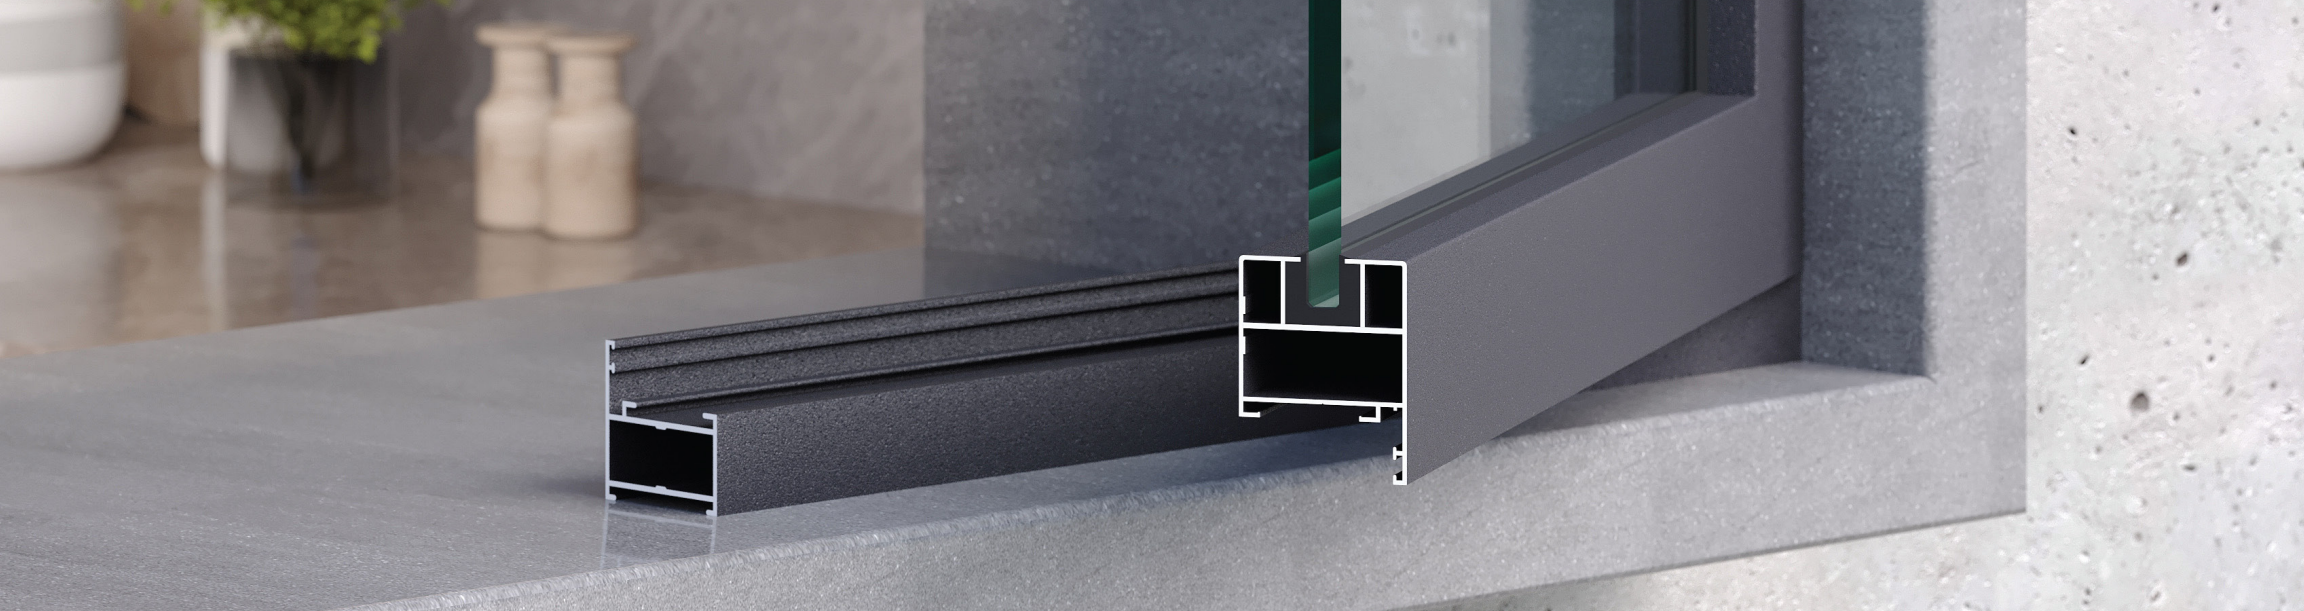


ARIES W OPENABLE

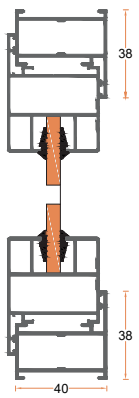

ARIES W FIXED



Attributes	Details
Face width	25mm
Frame height	39mm
Frame width	40mm
Profile thickness	1.20mm to 2.10mm
Max height of shutter	6 Feet
Max size of shutter	.15 sqft
Glazing	5mm to 6mm

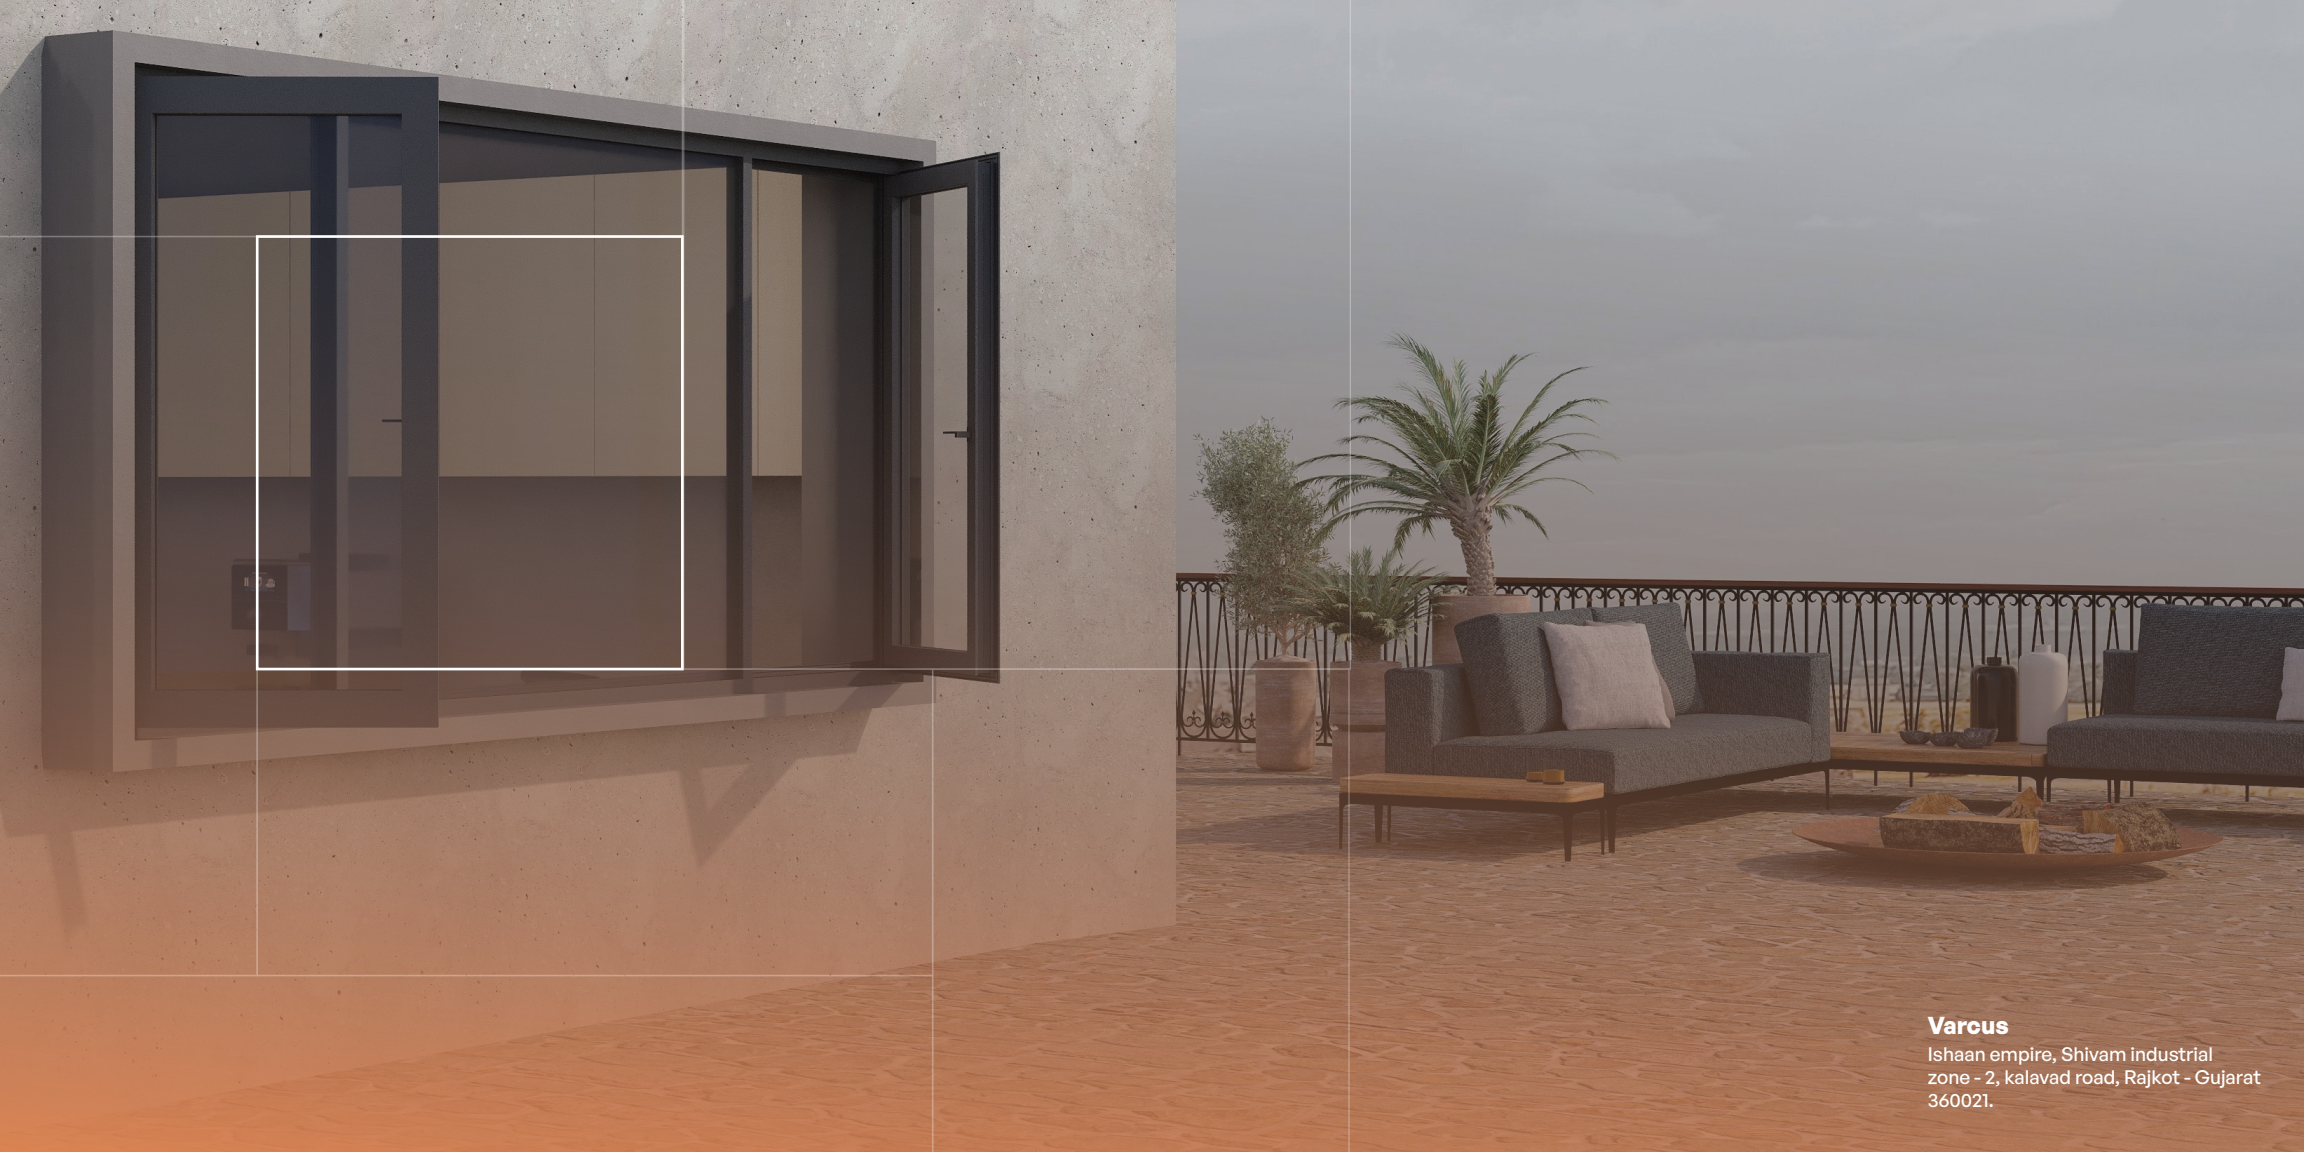

Varcus

Ishaan empire, Shivam industrial zone - 2, kalavad road, Rajkot - Gujarat 360021.